


C-620A

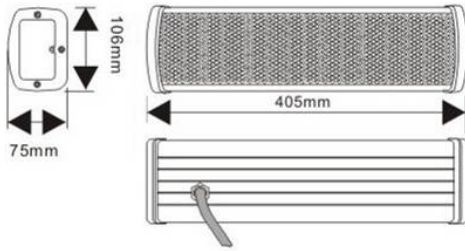

WARNING:

- Installation by qualified personnel only.
- Speakers must be wired in parallel and connected to the correct line terminals of amplifier.
- Ensure that all speakers have the same polarity with respect to each other.
- Do not select another tapings if the speaker is in use.
- No naked flame sources, such as lighted candles, should be placed on the apparatus.

SPECIFICATIONS

Model	C-620A
Speakers	4 of 2,5"
Output power RMS	20 W
Power taps	20 W & 10 W
Impedance	500 Ω & 1 k Ω
Sensitivity SPL	91 dB SPL at 1 W, 1 m & 1 kHz
Sound Pressure SPL	104 dB SPL at 20 W, 1 m & 1 kHz
Frequency Range	170 ~ 15.000 Hz
Dimensions (mm)	106 (width) x 405 (height) x 75 (depth)
Weight	2,04 kg
Finish	Aluminium
Color	White, RAL 9016
Mounting	Adjustable metallic bracket
Power selection	By cables

POWER SELECTION

Impedance	100 V	70 V	Cable
500 Ω	20 W	10 W	White
1 k Ω	10 W	5 W	Green
-	Common	Common	Black