


ACOUSTIC COLUMNS

C-600 series

Range of acoustic columns for speech and music applications.

Power from 20 to 40 W RMS with intermediate power settings.

Finishing in white aluminium, with a metallic swivel bracket for wall mounting . Suitable for outdoor and indoor use.

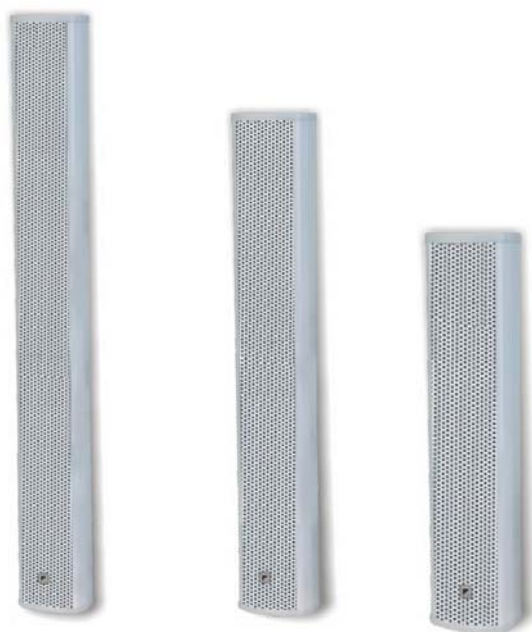

	C-620A	C-630A	C-640A
Loudspeakers	4 x 2,5"	6 x 2,5"	8 x 2,5"
Power (RMS)	20 W	30 W	40 W
Impedance	500 and 1k Ω	333 and 667 Ω	250 and 500 Ω
100 V line	20 and 10 W	30 and 15 W	40 and 20 W
Power selector	By cables		
Frequency response	170 ÷ 15.000 Hz		
Sensitivity (1 kHz) (SPL)	91 dB (1 W, m)	92 dB (1 W, 1 m)	93 dB (1 W, 1 m)
Sound pressure level (1 kHz) (SPL)	104 dB (20 W, 1 m)	107 dB (30 W, 1 m)	109 dB (40 W, 1 m)
Dimensions (mm)	106 x 405 x 75	106 x 548 x 75	106 x 691 x 75
Weight	2,04 kg	2,75 kg	3,46 kg
Finishing	White aluminium (RAL 9016)		
Accessories	Metal swivel bracket		